



**R 5\_\_ 304** Orifice size: 6 mm

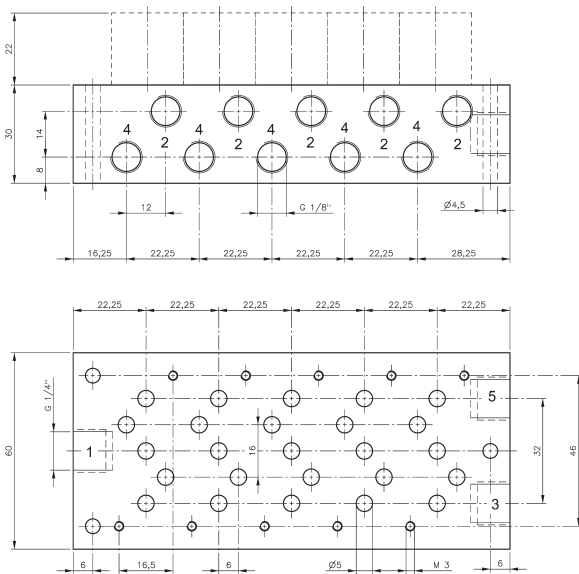

**R 5\_\_ 504** Orifice size: 6,6 mm

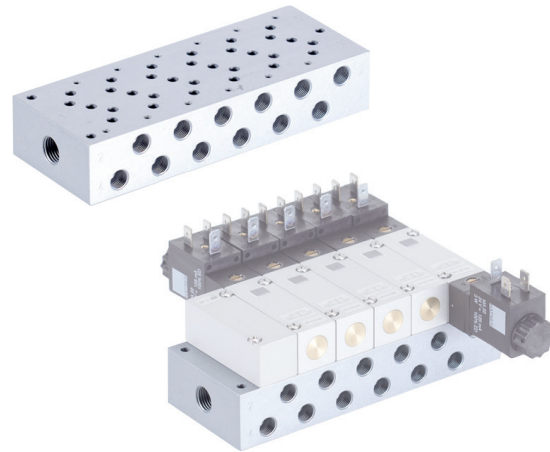

Common connection to port 1 (pressure), 3 (exhaust) and 5 (exhaust). The ports 2 and 4 of the individual valves are also located in the manifold plate.

The following solenoid valves can be assembled to the manifold plate type **R 5\_\_ 304** (G 1/8" orifice 3 mm):

- 5/2 single sol.      MH 510 304      page 2.5.2.2.4
- 5/2 double sol.     MH 520 304      page 2.5.2.2.8
- 5/3-way             MH 53\_304      page 2.5.3.2.4

Blanking plates are also available type BPH 5 304.

The following solenoid valves can be assembled to the manifold plate type **R 5\_\_ 504** (G 1/8" orifice 5 mm):

- 5/2 single sol.      MH 510 504      page 2.5.2.2.4
- 5/2 double sol.     MH 520 504      page 2.5.2.2.8
- 5/3-way             MH 53\_504      page 2.5.3.2.4

Blanking plates are also available type BP 5 504.

Stations	Type	Weight	Type	Weight
2	R 502 304	0,26 kg	R 502 504	0,30 kg
3	R 503 304	0,34 kg	R 503 504	0,40 kg
4	R 504 304	0,42 kg	R 504 504	0,50 kg
5	R 505 304	0,51 kg	R 505 504	0,60 kg
6	R 506 304	0,59 kg	R 506 504	0,70 kg
8	R 508 304	0,76 kg	R 508 504	0,89 kg
10	R 510 304	0,93 kg	R 510 504	1,08 kg
12	R 512 304	1,11 kg	R 512 504	1,29 kg